




SINGLE BEAM

WITH FULL-HEAD

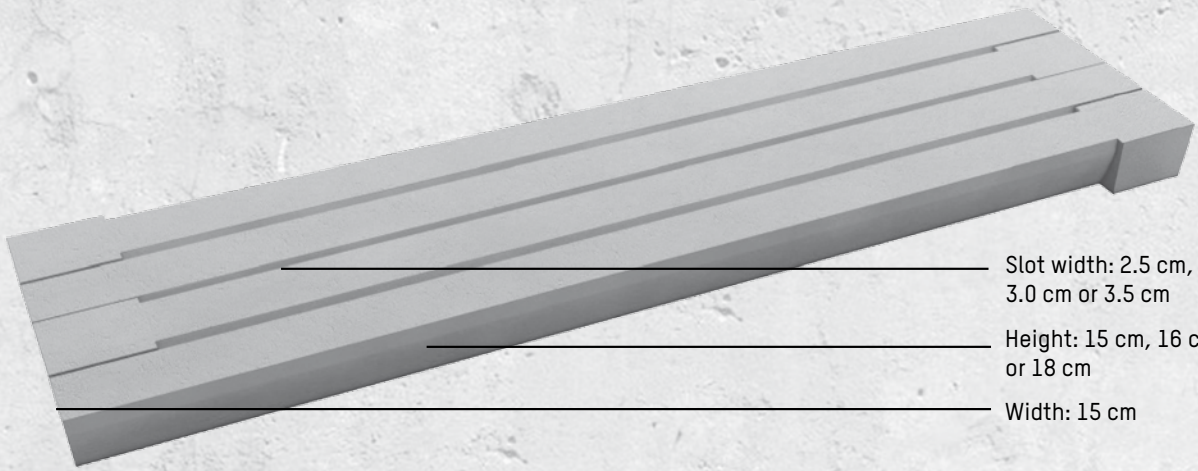

Slot width: 2.5 cm,
3.0 cm or 3.5 cm

Height: 15 cm, 16 cm
or 18 cm

Width: 15 cm

- ▶ Animal weight up to 850 kg
- ▶ A variable use for calves, young cattles and cattles is possible by the mutual laying of the individual beams
- ▶ Bearing: 12 cm
- ▶ Load class: A2/A3
- ▶ Tread width: 15 cm
- ▶ Concrete quality: C 40/50
- ▶ Manufactured according to the requirements of DIN EN 12737

SINGLE BEAM WITH FULL-HEAD

A variable use for calves, young cattle and cattle is possible by the mutual laying of the individual beams. The single beam is perfect for the rehabilitation of old stables. The low piece weight also allows installation in stable areas difficult to access.

A high maturity and stability is guaranteed by the animal-friendly interface. The slot width can be 2.5 cm and 3.0 cm or 3.5 cm.



SIZES:

Length in m	Height: 15 cm	Height: 16 cm	Height: 18 cm	Weight in kg/piece	Weight in kg/m ²
0.80	✓	✓	✓	36	240
0.90	✓	✓	✓	41	240
1.00	✓	✓	✓	46	240
1.10	✓	✓	✓	49	240
1.20	✓	✓	✓	53	240
1.30	✓	✓	✓	58	240
1.40	✓	✓	✓	62	240
1.50	✓	✓	✓	67	240
1.60	✓	✓	✓	71	240
1.70	✓	✓	✓	76	240
1.80	✓	✓	✓	80	240
1.90	✓	✓	✓	84	240
2.00	✓	✓	✓	89	240
2.10	✓	✓	✓	93	240
2.20	✓	✓	✓	98	240
2.30	✓	✓	✓	102	240
2.40	✓	✓	✓	107	240
2.50	✓	✓	✓	111	240
2.60	✓	✓	✓	116	240
2.70	✓	✓	✓	120	240
2.80	✓	✓	✓	124	240
2.90	✓	✓	✓	129	240
3.00	✓	✓	✓	133	240
3.10	✓	✓	✓	138	240
3.20	✓	✓	✓	142	240
3.30	✓	✓	✓	147	240
3.40	✓	✓	✓	151	240
3.50	✓	✓	✓	155	240
3.60	-	-	✓	160	274
3.70	-	-	✓	164	274
3.80	-	-	✓	169	274
3.90	-	-	✓	173	274
4.00	-	-	✓	203	274

The illustrations may differ from the actual version.
Subject to technical changes.

Manufactured according to the requirements of DIN EN 12737



Thye-Lokenberg Betonwerke GmbH
Erlenweg 4
D-49434 Neuenkirchen-Vörden
Phone +49 5493 - 99219-0
Fax +49 5493 - 99219-20
info@thye-lokenberg.de

Thye-Lokenberg Polska Sp. z o.o.
ul. Osiedlowa 27
PL 68-114 Tomaszowo
Phone +48 68 3606-199
Fax +48 68 3606-398
thye@thye-lokenberg.pl

www.thye-lokenberg.com